

CarestreamNDT HPX-DR Non-Glass DR Detector



NEW NON-GLASS DR!

Carestream NDT once again introduces breakthrough technology for NDT field imaging with our new non-glass DR detector. The new HPX-DR Non-Glass detector design incorporates a tougher material instead of glass for maximum durability against the rigors of NDT field work.

The HPX-DR Non-Glass detector virtually eliminates costly repairs for broken glass and comes with a 2-Year warranty.

- 139 μm pixel pitch for high-resolution imaging
- Large format (350 x 430mm) and thin profile (14.7mm)
- Heavy-duty shielding designed specifically for high exposure NDT applications
- Protective, weatherproof enclosure – perfect for remote fieldwork
- Close-to-edge imaging capability
- Robust wireless connectivity
- Uses the same INDUSTREX software on your current Carestream NDT digital products
- Powerful lithium-ion batteries with battery 'hot-swap' to keep the detector running during battery change
- Optional protective case and mount kit adds even more durability and product longevity



COMES WITH A 2-YEAR WARRANTY!

We're so confident in the design and reliability of our new durable detector that we're offering a two-year warranty.

Carestream NDT

HPX-DR Non-Glass DR Detector

SPECIFICATIONS

MECHANICAL

Size (mm)	Active area: 350 x 430 Dimensions: 383.5 x 459.5 x 14.7
Weight	5.3 kg (11.9 lbs.)
Housing Material	Aluminum
Load Limit	Distributed evenly over detector area: 170 kg. (375 lb.)
Conversion Screen	Scintillator
Pixel Size (µm)	139 x 139
Scan Method	Progressive
A/D Conversion (bits)	16
Resolution	3.6 lp/mm


WIRELESS SYSTEM

Network Type	Isolated Private Wireless LAN (WLAN), Enterprise Wireless
Wireless Protocol	802.11 A - or - N - or - G

ENVIRONMENTAL


Shock	High shock tolerance
Temperature Range (°C)	-20 to +50 Ambient-Storage (-23 to +60) Shipping (-23 to +60)
Relative Humidity	Operating 10 - 86%
Non-Condensing	Storage 10 - 86%
Ingress Protection	IP57

HIGH RESOLUTION OUTPUT IN THE LAB OR IN THE FIELD

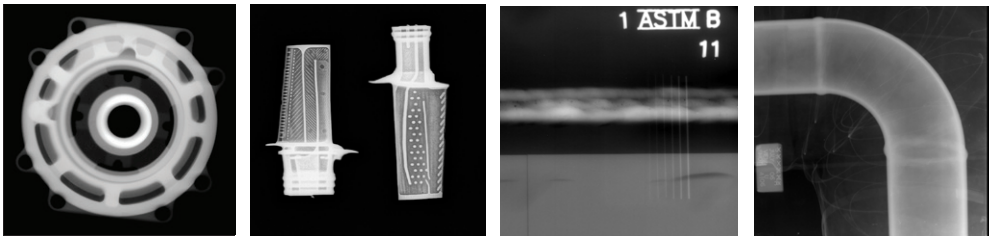

ACCESSORIES FOR EVEN MORE STRENGTH AND LONGEVITY

Protective cover for lab use increases detector load limit up to 340 kg. (750 lbs.).

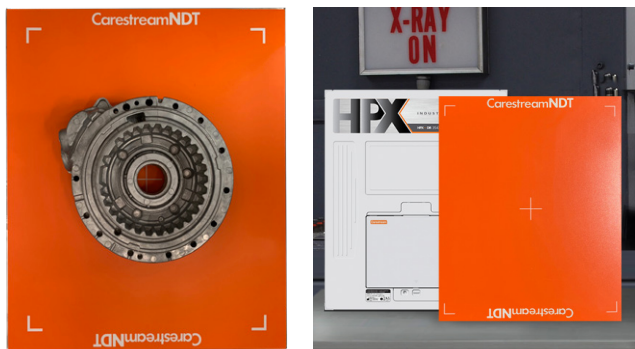

Mount kit with pipe cleats to reduce stress on the detector for pipeline imaging.



**CARESTREAM NDT AND YOU.
WE'RE BETTER TOGETHER.**

carestream.com/ndt

